

# SONY

## Enthral your guests

32" and 40" LCD Public Displays



**SRS**  **WOW**

**BBE**  
DIGITAL

**HDMI**™  
HIGH DEFINITION MULTIMEDIA INTERFACE

**HD**  
ready

# SONY

- High resolution widescreen displays (1366x768) with 16.77 million displayable colours.
- Durable and elegant acrylic bezel design (available for the Silver model)
- HD-Ready
- Great picture quality – very high brightness (500 cd/m<sup>2</sup>) combines with 1300:1 contrast ratio to deliver incredibly bright, clear images.
- Integrated high performance scan converter – for extra smooth playback of video or PC signals.
- Dual option slots for installation of add-on boards (first slot is pre-installed with BKM-FW10, second slot is pre-installed with BKM-FW20\*).
- Dual HDMI inputs.
- Includes built-in audio amplifier to drive optional loudspeakers.
- Special menu for hotel installation with advanced settings\*\*.

\* Monitor Control Adaptor (RS232C/Control-S)

\*\* Please contact your local Sony dealer for details



SILVER



BLACK



CRYSTAL SILVER




Model Name	FWD-32LX2F*1 FWD-32LX2X*2	FWD-40LX2F*1 FWD-40LX2X*2
Panel		
Panel size	32"	40"
Maximum resolution	1366 x 768	
Luminance	500 cd/m <sup>2</sup>	
Contrast (dark room)	1300:1	
Viewing angle (H/V)	176°/176°	178°/178°
Pixel size (HxV)	0.510x0.510 mm	0.648x0.648 mm
Colours (millions)	16.77	
Display area (HxV)	698x392 mm	885x498 mm
Panel life (hours)	60000	
Input connectors		
PC	HD15, HDMI (x 2)	
Video	Video/S video, HDMI (x 2)	
Audio	RCA (L/R) x 1/ Stereo mini x 2	RCA (L/R)x2/ Stereo mini x 2
Control	RS232C/Control-S	
Output connectors		
PC	-	
Video	Video/S video	
Speaker	L/R	
Audio	RCA (L/R)	RCA x 2 (L/R)
Control	Control-S	
PC input		
Frequency (H/V)	15-110kHz/48-120Hz (analogue) 31.5-75kHz/60Hz (digital)	
Video signal	NTSC/PAL/SECAM/NTSC4.43/PAL-M/ PAL60/PAL-N	
Audio output	2x7 W (SRS WOW/BBE DIGITAL*3)	
Power		
Requirements	AC100-240V, 50/60Hz	
Consumption	120 W (typical)	200 W (typical)
Dimensions (WxHxD) (mm)		
Crystal Version (X)	802 x 492 x 107	994 x 597 x 125
Non-Crystal Version (F)	796 x 486 x 107	988 x 591 x 125
Weight		
Crystal Version (X)	approx. 17 kg	approx.26 kg
Non-Crystal Version (F)	approx. 16 kg	approx. 25 kg
Optional slots		
Optional slots	2	
Display options		
Picture in Picture (PIP)	-	
Picture and Picture (PAP)	3 patterns	
Multi-display setup	Yes	
Supplied accessories		
Power cable	•	
Instruction manual	•	
Component video	•	
HD15/RCA cable	•	
BNC/RCA conversion adaptor	•	
Cable holder	6	4
Remote controller	RM-FW001	
Batteries	•	
Warranty card	•	
Optional accessories		
Input boards	BKM-FW10*/BKM-FW11/BKM-FW12	
Stands and brackets	SU-32FW/FS-LP1NL/ WB-LP1NL/CB-LP1NL	SU-42FW/FS-LP1NL/ WB-LP1NL/CB-LP1NL
Speakers	SS-SP32FW	SS-SP40FW
Network management	BKM-FW32	
Streaming receiver	BKM-FW50	
Warranty	2 years	

\*1 Non-crystal version

\*2 Crystal version

\*3 Manufactured under license from BBE Sound, Inc. WOW, SRS and (●)® symbol are trademarks of SRS Labs, Inc.

\*4 Pre-installed in display

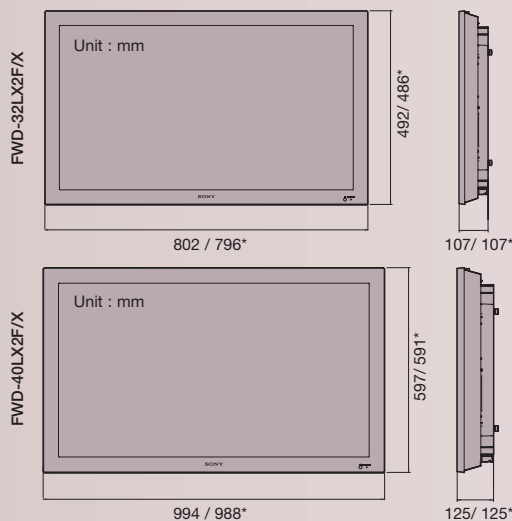

\* For non-Crystal Silver model.

© 2006. Sony and the Sony logo are trademarks of the Sony Corporation, Japan. HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. Due to the LCD panel manufacturing process we cannot guarantee that all pixels are functional. Features and specifications are subject to change without notice. Some products may not be available in all countries. Sony Corporation is not responsible for any errors which may appear in this document.

CA FWD-32LX2-40LX2\_GB-29/09/2006

www.sonybiz.net